


LUXAFLEX® FABRIC COLLECTION

LOU LOU


ROLLER BLIND, PANEL GLIDE, ROMAN SHADE APPLICATIONS

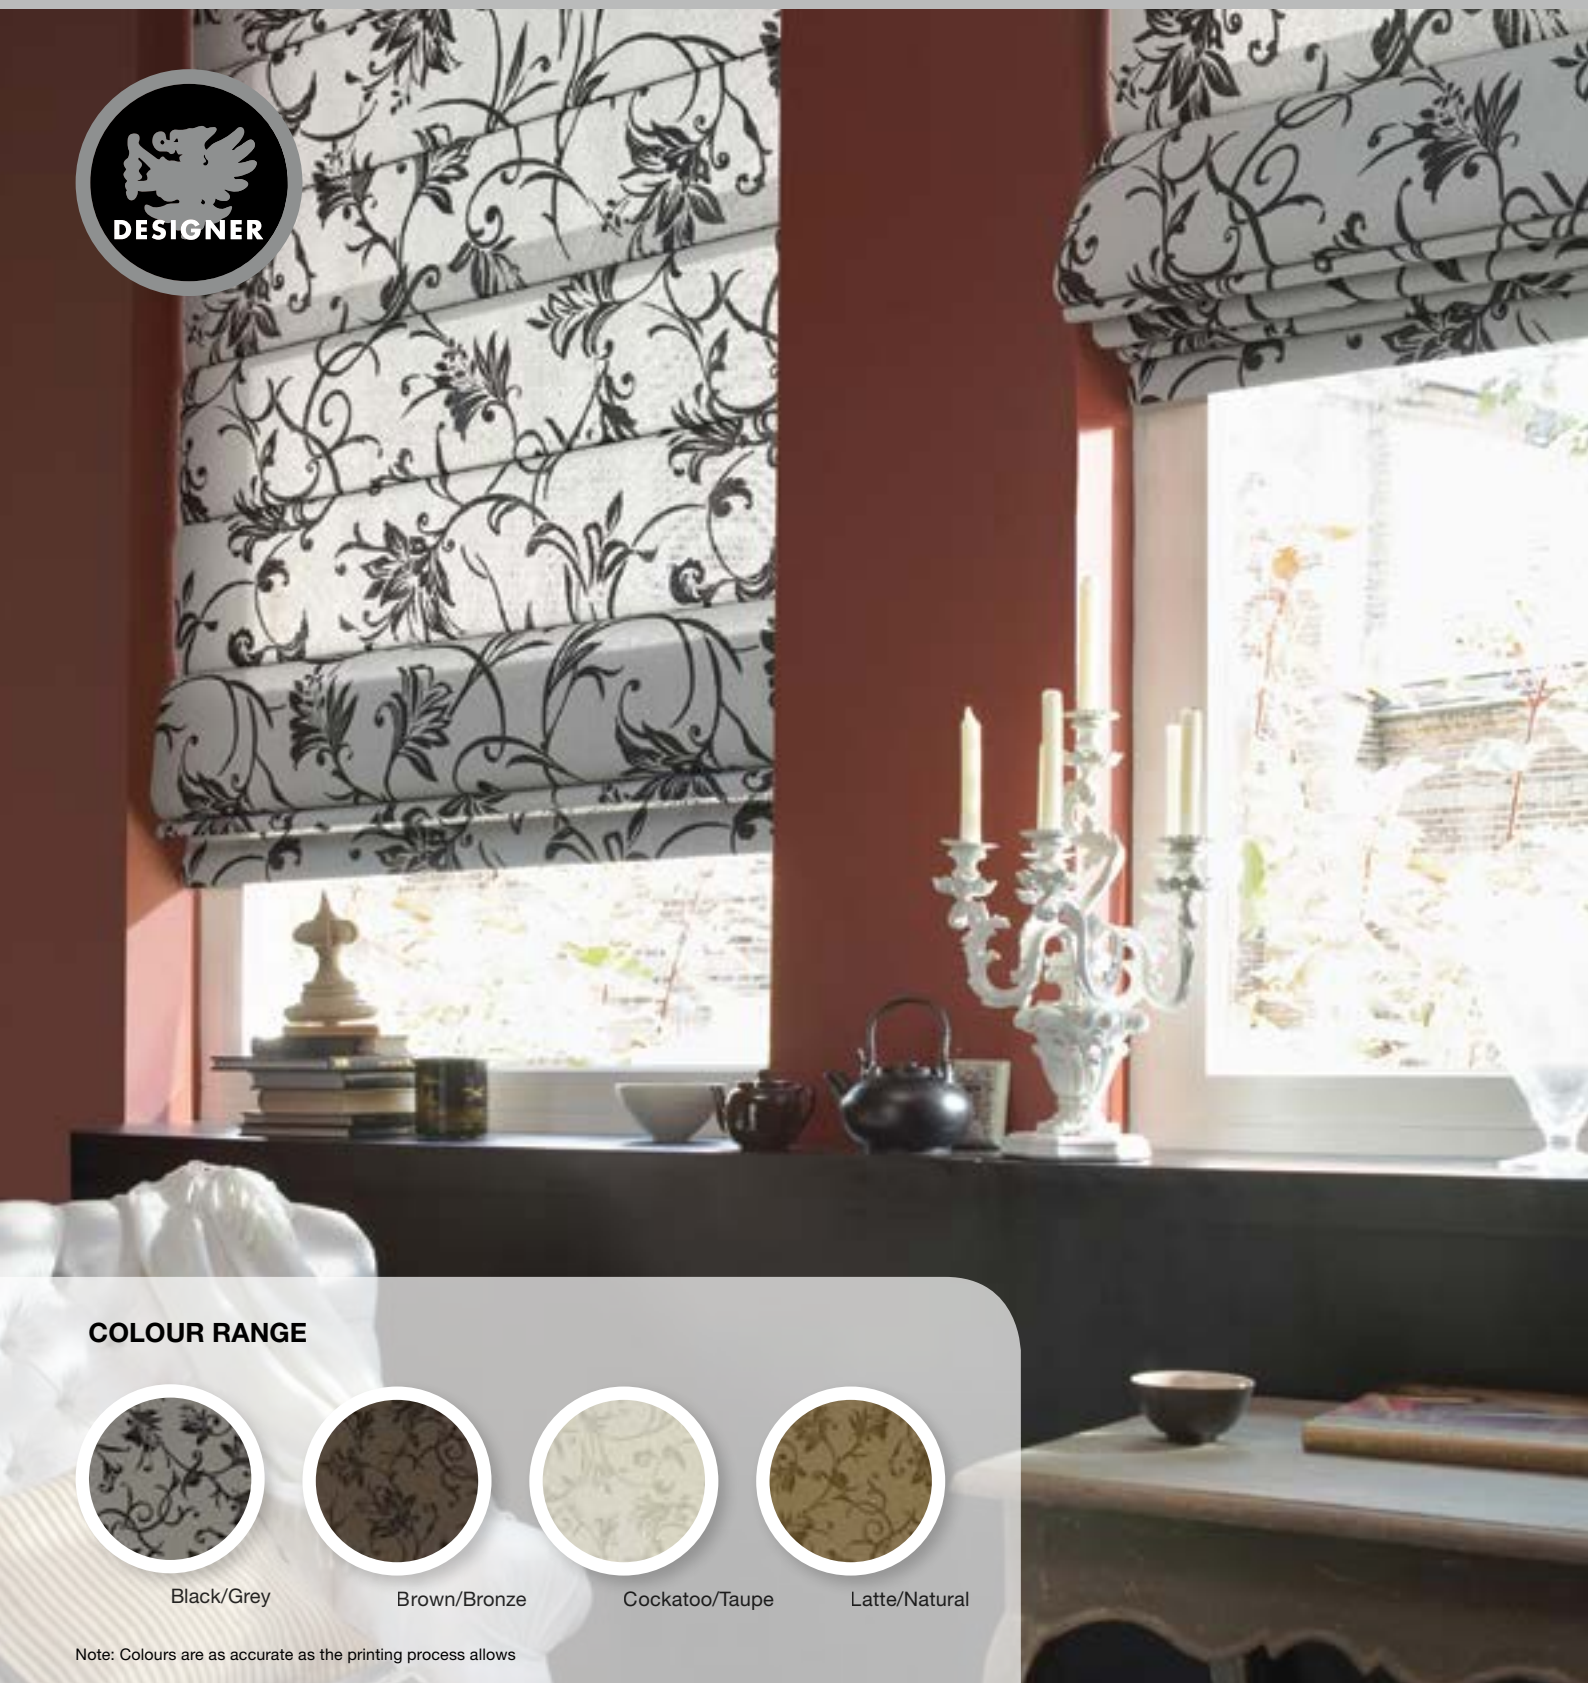

COLOUR RANGE



Black/Grey



Brown/Bronze



Cockatoo/Taupe



Latte/Natural

Note: Colours are as accurate as the printing process allows

SIMPLY **SMARTER** BY DESIGN

LOU LOU

ROLLER BLIND, PANEL GLIDE, ROMAN SHADE APPLICATIONS

FABRIC

Lou Lou Fabric has a chic two tone design print that adds character to any room.

Available in 4 translucent colours, Lou Lou Fabric provides privacy and UV protection whilst still letting light gently filter in.

FEATURES & BENEFITS

Opacity

4 translucent colours

Made in Australia

Proudly made in Australia to support the local textile industry.

TECHNICAL SPECIFICATIONS

Composition

100% Polyester

Fabric Weight

210gsm ± 10gsm

Fabric Thickness

0.41mm

Colour Fastness

6-7 Blue Scale

Roll Size

2m x 40m

Cutting Techniques

Ultrasonic, Knife Cut

CARE AND CLEANING

General Care:

Dusting with a feather duster is all that is required to keep your fabric looking good.

Stains

For the removal of dirt and grime, simply wipe fabric skins with a sponge soaked in lukewarm water. If marks are still visible add a little detergent. Then dry gently with a clean cloth.

COMFORT RATING™# AND SOLAR OPTICAL GUIDE

COMFORT RATING™# GUIDE					SOLAR OPTICAL PROPERTIES (ASTM E 424 -1971)							
					Heat Properties	Visible Light Properties	UV	Heat Control				
COLOUR	TS	RS	AS	TL	RL	AL	TUV	SC				
Black/Grey	◆◆◆	◆◆	◆◆◆	◆◆◆	15	18	67	17	17	66	10	0.64
Brown/Bronze	◆◆◆	◆◆	◆◆◆	◆◆◆	11	12	77	13	10	77	8	0.66
Cockatoo/Taupe	◆◆◆	◆◆	◆◆	◆	39	47	14	35	47	18	22	0.51
Latte/Natural	◆◆◆	◆◆	◆◆	◆◆	23	26	51	21	24	55	14	0.6

COMFORT RATING™# GUIDE

- ◆ No protection/performance
- ◆◆ Low level of protection/performance
- ◆◆◆ Medium level of protection/performance
- ◆◆◆◆ High level of protection/performance
- ◆◆◆◆◆ Highest level of protection/performance

- Heat Protection
- Glare Reduction
- UV Protection
- Shade Factor

COMFORT RATING™# has been devised by Hunter Douglas Limited with the assistance of Canesis Pty Ltd - an Independent Australian Fibre and Textile Research and Development Company.



SOLAR OPTICAL PROPERTIES

AS Heat Absorbance (%)	The percentage of solar energy (heat) absorbed by the fabric. The higher the value the more heat is absorbed by the fabric.
RS Heat Reflectance (%)	The percentage of solar energy (heat) reflected by the fabric. The higher the value the more heat is reflected by the fabric.
TS Heat Transmittance (%)	The percentage of heat transferred through the fabric. The lower the value the less heat is transferred through the fabric.
AL Light Absorbance (%)	The percentage of light absorbed by the fabric. The lower the value the more light is absorbed by the fabric.
RL Light Reflectance (%)	The percentage of light reflected by the fabric. The higher the value the more light is reflected away from the fabric.
TL Light Transmittance (%)	The percentage of light transferred through the fabric. The lower the value the less light is transferred through the fabric.
SC Shading Coefficient	The efficiency of a fabric to provide shade. The higher the figure the more efficient at providing shade.
TUV Ultra Violet Transmittance	The value of ultra violet light going through the fabric. The lower the value the less ultra violet light goes through the fabric.

FIRE RETARDANT INFORMATION



Lou Lou Fabric has a Fire Retardancy rating suitable for residential applications. It has been independently tested to AS1530.3* and AS1530.2^.

Ignitability Index*	7 [Range 0-10]
Spread of Flame Index*	9 [Range 0-10]
Heat Evolved Index*	3 [Range 0-10]
Smoke Developed Index*	7 [Range 0-10]
Flammability Index^	49 [Range 0-100]