


LUXAFLEX® FABRIC COLLECTION

# SOLTEC


ROLLER BLIND APPLICATIONS



## COLOUR RANGE



White



Linen / White




Linen



Pearl/Linen



Pumice



Iron



Jave



Ochre



Stone



Militant/Grey



Bark



Smudge



Midnight



Onyx



Blue Varnish



Shale



Pearl



Pearl/White



Athena

Note: Colours are as accurate as the printing process allows

SIMPLY SMARTER BY DESIGN



# SOLTEC

ROLLER BLIND APPLICATIONS

## FABRIC

Soltec sunscreens ensure privacy for the home whilst still allowing an abundance of natural light to penetrate the room.

Available in multiple colour options, Soltec's modern 1 x 2 basket weave design provides a consistent weave look throughout the fabric.

## FEATURES & BENEFITS

### Opacity

19 sunscreen Colours

### Made in Australia

Proudly made in Australia to support the local textile industry.

## TECHNICAL SPECIFICATIONS

### Composition

PVC coated Polyester

### Fabric Weight

410 gsm ± 5%

### Fabric Thickness

0.57mm ± 5%

### Colour Fastness

6-7 Blue Scale

## CARE AND CLEANING

### General Care:

Remove dust with vacuum cleaner on low suction setting. Do not scrub.

### Stains

Clean with sponge dipped in soapy water. Leave blind down until completely dry.

## COMFORT RATING™# AND SOLAR OPTICAL GUIDE


COMFORT RATING™# GUIDE	☀️	🕶️	☁️	🛡️	SOLAR OPTICAL PROPERTIES (ASTM E 424 -1971)							
					Heat Properties		Visible Light Properties		UV	Heat Control		
COLOUR	TS	RS	AS	TL	RL	AL	TUV	SC				
White	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆	19	66	15	13	?	?	3	0.34
Midnight	◆◆◆	◆◆◆	◆◆◆	◆◆◆◆	4	4	92	4	?	?	3	0.65
Pumice	◆◆◆◆	◆◆◆	◆◆◆◆	◆◆◆◆	5	26	69	4	?	?	2	0.59
Iron	◆◆◆	◆◆◆	◆◆◆◆	◆◆◆◆	5	22	79	4	?	?	3	0.65

## COMFORT RATING™# GUIDE

- ◆ No protection/performance
- ◆◆ Low level of protection/performance
- ◆◆◆ Medium level of protection/performance
- ◆◆◆◆ High level of protection/performance
- ◆◆◆◆◆ Highest level of protection/performance



# COMFORT RATING™# has been devised by Hunter Douglas Limited with the assistance of Canesis Pty Ltd - an Independent Australian Fibre and Textile Research and Development Company.

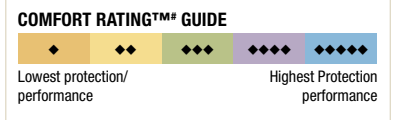

## SOLAR OPTICAL PROPERTIES

<b>AS</b> Heat Absorbance (%)	The percentage of solar energy (heat) absorbed by the fabric. The higher the value the more heat is absorbed by the fabric.
<b>RS</b> Heat Reflectance (%)	The percentage of solar energy (heat) reflected by the fabric. The higher the value the more heat is reflected by the fabric.
<b>TS</b> Heat Transmittance (%)	The percentage of heat transferred through the fabric. The lower the value the less heat is transferred through the fabric.
<b>AL</b> Light Absorbance (%)	The percentage of light absorbed by the fabric. The lower the value the more light is absorbed by the fabric.
<b>RL</b> Light Reflectance (%)	The percentage of light reflected by the fabric. The higher the value the more light is reflected away from the fabric.
<b>TL</b> Light Transmittance (%)	The percentage of light transferred through the fabric. The lower the value the less light is transferred through the fabric.
<b>SC</b> Shading Coefficient	The efficiency of a fabric to provide shade. The higher the figure the more efficient at providing shade.
<b>TUV</b> Ultra Violet Transmittance	The value of ultra violet light going through the fabric. The lower the value the less ultra violet light goes through the fabric.

## FIRE RETARDANT INFORMATION



Soltec Fabric has a Fire Retardancy rating suitable for residential applications. It has been independently tested to AS1530.3\* and AS1530.2^.

### Sunscreen

Ignitability Index*	0 [Range 0-10]
Spread of Flame Index*	0 [Range 0-10]
Heat Evolved Index*	0 [Range 0-10]
Smoke Developed Index*	6 [Range 0-10]
Flammability Index^	0 [Range 0-100]