

LUXAFLEX® FABRIC COLLECTION

XCEED

ROLLER BLINDS



COLOUR RANGE



Sand / Silver



Seashell / Silver



Mocha / Silver

Note: Colours are as accurate as the printing process allows

SIMPLY **SMARTER** BY DESIGN



XCEED

ROLLER BLINDS

FABRIC

Elegance and refinement in ultimate perfection.

Thanks to the jacquard weaving technique, this innovation solar shading fabric has a finely structured surface of fine woven fabrics and is also 100% PVC-free.

FEATURES & BENEFITS

Opacity

3 sunscreen colours

TECHNICAL SPECIFICATIONS

Composition

PES

Fabric Weight

230gsm

Fabric Thickness

0.56mm

Colour Fastness

5 Blue Scale [AS 2001.4.21]

Roll Size

2.4m x 50m

Cutting Techniques

Ultrasonic

CARE AND CLEANING

General Care:

Dusting with a feather duster is all that is required to keep your fabric looking good.

Stains

For the removal of dirt and grime, simply wipe fabric skins with a sponge soaked in lukewarm water. If marks are still visible add a little detergent. Then dry gently with a clean cloth.

COMFORT RATING™# AND SOLAR OPTICAL GUIDE


COMFORT RATING™# GUIDE	SOLAR OPTICAL PROPERTIES (ASTM E 424 - 1971)					
	Heat Properties		Visible Light Properties		UV	
COLOUR	TS	RS	TL	RL	TUV	
Mocha / Silver	◆◆◆◆ ◆◆◆◆ ◆◆◆◆ ◆◆◆◆	5	40	4	40	4
Seashell / Silver	◆◆◆◆ ◆◆◆◆ ◆◆◆◆ ◆◆◆◆	6	43	5	41	5
Sand / Silver	◆◆◆◆ ◆◆◆◆ ◆◆◆◆ ◆◆◆◆	6	43	5	41	5

COMFORT RATING™# GUIDE

- ◆ No protection/performance
- ◆◆ Low level of protection/performance
- ◆◆◆ Medium level of protection/performance
- ◆◆◆◆ High level of protection/performance
- ◆◆◆◆◆ Highest level of protection/performance

- Heat Protection
- Glare Reduction
- UV Protection
- Shade Factor

COMFORT RATING™# has been devised by Hunter Douglas Limited with the assistance of Canesis Pty Ltd - an Independent Australian Fibre and Textile Research and Development Company.

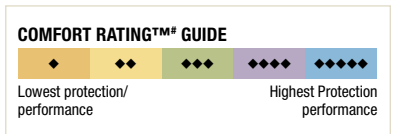

SOLAR OPTICAL PROPERTIES

AS Heat Absorbance (%)	The percentage of solar energy (heat) absorbed by the fabric. The higher the value the more heat is absorbed by the fabric.
RS Heat Reflectance (%)	The percentage of solar energy (heat) reflected by the fabric. The higher the value the more heat is reflected by the fabric.
TS Heat Transmittance (%)	The percentage of heat transferred through the fabric. The lower the value the less heat is transferred through the fabric.
AL Light Absorbance (%)	The percentage of light absorbed by the fabric. The lower the value the more light is absorbed by the fabric.
RL Light Reflectance (%)	The percentage of light reflected by the fabric. The higher the value the more light is reflected away from the fabric.
TL Light Transmittance (%)	The percentage of light transferred through the fabric. The lower the value the less light is transferred through the fabric.
SC Shading Coefficient	The efficiency of a fabric to provide shade. The higher the figure the more efficient at providing shade.
TUV Ultra Violet Transmittance	The value of ultra violet light going through the fabric. The lower the value the less ultra violet light goes through the fabric.

FIRE RETARDANT INFORMATION



Xceed Fabric has a Fire Retardancy rating suitable for residential applications. It has been independently tested to AS1530.3* and AS1530.2^.

Ignitability Index*	0 [Range 0-10]
Spread of Flame Index*	0 [Range 0-10]
Heat Evolved Index*	0 [Range 0-10]
Smoke Developed Index*	2 [Range 0-10]
Flammability Index^	9 [Range 0-100]